

# INSTALLATION INSTRUCTIONS FOR FIXTURE

**#3000-5SG. #3000P-SG.#3000-6SG**

**#3000-5OS. #3000P-OS.#3000-6OS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling including the mounting hardware.
2. Careful that all parts are included as shown in the illustration.
3. Using China connects the loops (F) on bottom of canopy and top of fixture housing.
4. Install the bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**

## MOUNTING THE FIXTURE (Fig. 1)

5. Attach the mounting bar (A) to the outlet box using the outlet box screws (C). The side of the cross bar marked "GND" must face out.
6. Attach the fixture body onto the mounting bar (A) by protruding center on nipple (B) through the mounting holes of the canopy (D) and secure with loop (E).

## CONNECTING THE WIRES (Fig. 2)

1. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the cross bar using the green screw provided.
2. After wires are connected, tuck them carefully into the ceiling junction box.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Fig.1**

Mounting plate

Ground Screw

Mounting Screw(2)


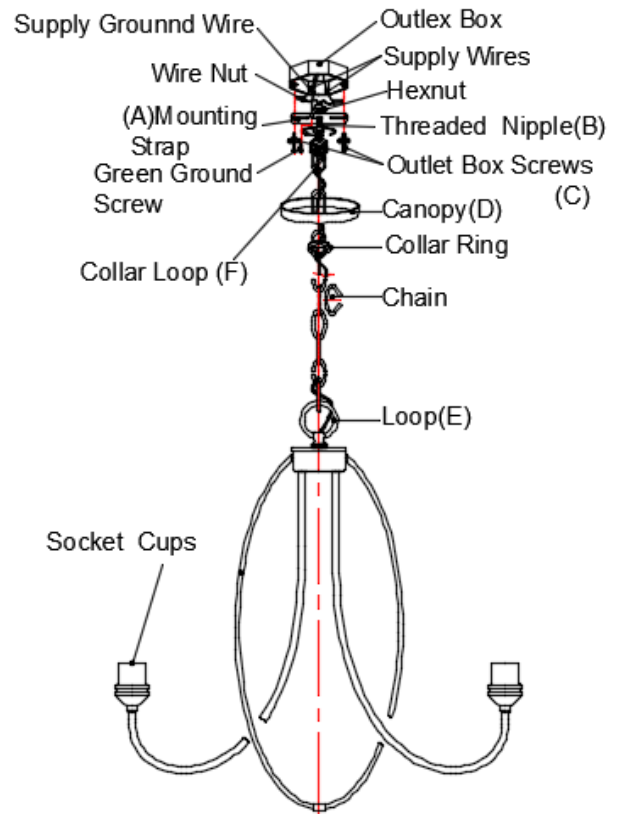



Fig .2

FIXTURE WIRES  
Black or Smooth




HOUSE WIRES  
Black (Hot)

FIXTURE WIRES  
White or Ribbed



HOUSE WIRES  
White (Neutral)

FIXTURE WIRES  
Bare Copper (Ground)



HOUSE WIRES  
Green (Ground)

